

この図面は、
タキゲン製造（株）：https://www.takigen.co.jp/
総合カタログNo.27からの抜粋です。

平蝶番



B-2078 B-1078 B-1078-BR

チタン製

ステンレス製

ステンレス製

Ti SUS 平型蝶番 BUTT HINGES

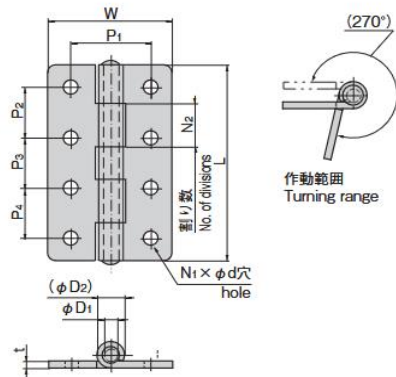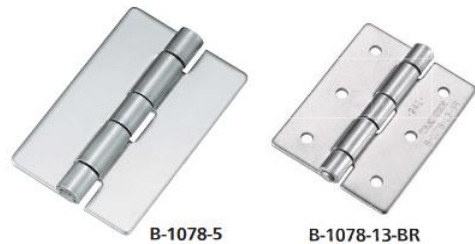

特徴 Feature	
● チタン製・ステンレス製で耐食性に優れています。 ● Corrosion-resistant stainless steel/titanium is used.	
仕様	
仕 様	● 材 質：純チタン2種
(B-2078)	● 表面仕上：ピーズショット処理
(B-1078 B-1078-BR)	● 材 質：ステンレス鋼板(SUS304)
	● 表面仕上：鏡面バフ研磨(B-1078)
	バレル研磨(B-1078-BR)
用途	● 船舶・車両・厨房機器・屋外用機器
納期	● 標準在庫品(B-1078/B-1078-BR)
備考	● 穴なし(B-1078-1～6、B-1078-1～6-BR)
	● 穴あき(B-2078-11～16、B-1078-11～16、B-1078-11～16-BR)
	● 鉄製はB-41(686ページ)をご使用ください。
	● チタン製B-2078-1～6は中止品になりました。
Specifications	
(B-2078)	● Material: Pure titanium grade 2
	● Finish: Beading process
(B-1078 B-1078-BR)	● Material: Stainless steel plate (SUS304)
	● Finish: Mirror surface buffing (B-1078)
	Barrel polishing (B-1078-BR)
Specific use	● Ships, vehicles, kitchen and outdoor equipment
Remarks	● Without hole (B-1078-1 to 6, B-1078-1 to 6-BR)
	● With hole (B-2078-11 to 16, B-1078-11 to 16-BR)
	● For iron-made, use B-41 on page 686.
	● Titanium B-2078-1 through 6 are no longer manufactured.

商品番号 Product No.	備 考 Remarks	RoHS 10	L	W	t	P ₁	P ₂	P ₃	P ₄	φd	φD ₁	(φD ₂)	N ₁	N ₂	参考値(2個使用) Reference values (Using 2 pieces)		製品質量(g) Mass	コード Code
															扉高×扉幅 Door height× door width	扉質量(kg) Door mass		
B-2078-11	穴あき With hole Ti ピーズ ショット 処理 Beading process	●	40	35	1.5	22	26			3.2	3	6.3	4	3	600×300	4.5	13	12911
B-2078-12		●	50	35	1.5	22	34			4.3	3	6.3	4	3	600×300	7	16	12912
B-2078-13		●	65	50	2	30	23	23		4.3	4	8.8	6	5	600×300	20	41	12913
B-2078-14		●	75	50	2	30	27	27		5.3	4	8.8	6	5	600×300	21	45	12914
B-2078-15		●	90	60	3	38	35	35		6.4	6	12.3	6	5	600×300	56	105	12915
B-2078-16	穴なし Without hole	●	100	60	3	38	26	26	26	6.4	6	12.3	8	5	1200×600	30	110	12916
B-1078-1		●	40	35	1.5					3	6.3		3		600×300	7.1	25	10681
B-1078-2		●	50	35	1.5					3	6.3		3		800×400	8	30	10682
B-1078-3		●	65	50	2					4.5	8.8		5		1200×600	15	70	10683
B-1078-4		●	75	50	2					4.5	8.8		5		1200×600	16	85	10684
B-1078-5	穴あき With hole SUS 鏡面バフ 研磨 Mirror surface buffing	●	90	60	3					6	12.3		5		1600×800	32	190	10685
B-1078-6		●	100	60	3					6	12.3		5		1600×800	35	200	10686
B-1078-11		●	40	35	1.5	22	26			3.2	3	6.3	4	3	600×300	7.1	25	10687
B-1078-12		●	50	35	1.5	22	34			4.3	3	6.3	4	3	800×400	8	30	10688
B-1078-13		●	65	50	2	30	23	23		4.3	4.5	8.8	6	5	1200×600	15	70	10689
B-1078-14	穴なし Without hole	●	75	50	2	30	27	27		5.3	4.5	8.8	6	5	1200×600	16	85	10690
B-1078-15		●	90	60	3	38	35	35		6.4	6	12.3	6	5	1600×800	32	180	10691
B-1078-16		●	100	60	3	38	26	26	26	6.4	6	12.3	8	5	1600×800	35	195	10692
B-1078-1-BR		●	40	35	1.5					3	6.3		3		600×300	7.1	25	13527
B-1078-2-BR		●	50	35	1.5					3	6.3		3		800×400	8	30	13528
B-1078-3-BR	穴なし Without hole	●	65	50	2					4.5	8.8		5		1200×600	15	70	13529
B-1078-4-BR		●	75	50	2					4.5	8.8		5		1200×600	16	85	13530
B-1078-5-BR		●	90	60	3					6	12.3		5		1600×800	32	190	13531
B-1078-6-BR		●	100	60	3					6	12.3		5		1600×800	35	200	13532
B-1078-11-BR		●	40	35	1.5	22	26			3.2	3	6.3	4	3	600×300	7.1	25	13533
B-1078-12-BR	穴あき With hole SUS バレル 研磨 Barrel polishing	●	50	35	1.5	22	34			4.3	3	6.3	4	3	800×400	8	30	13534
B-1078-13-BR		●	65	50	2	30	23	23		4.3	4.5	8.8	6	5	1200×600	15	70	13535
B-1078-14-BR		●	75	50	2	30	27	27		5.3	4.5	8.8	6	5	1200×600	16	85	13536
B-1078-15-BR		●	90	60	3	38	35	35		6.4	6	12.3	6	5	1600×800	32	180	13537
B-1078-16-BR		●	100	60	3	38	26	26	26	6.4	6	12.3	8	5	1600×800	35	195	13538

●: RoHS10指令対応品 ▲: RoHS10指令に対応可能です。

Hinge,B1078-12

Drawing No.: 000041A

Date: 2024-Dec-11